


Gas-fired wall-mounted condensing boiler  
Standard heating boiler 25 to 230 MBH  
Combi heating boiler 25 to 91 MBH  
Multi-boiler installation 344 to 920 MBH

**VIESSMANN**

# VITODENS 200

*Innovative. Highest efficiency. Reliable.*

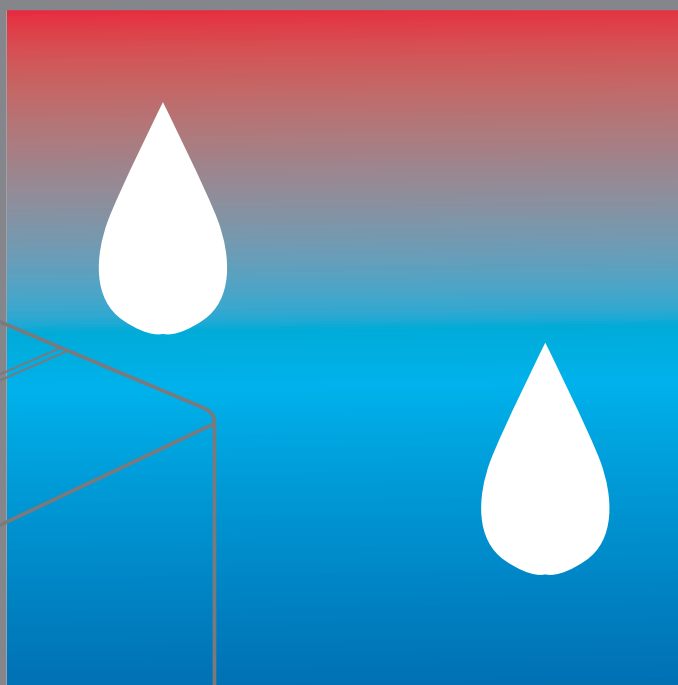

# VITODENS 200


Maximize fuel efficiency and minimize your annual heating cost! This high-tech wall-mounted condensing boiler is economical, extremely reliable and compact – and it's unparalleled in the heating industry. Here is why...

Now with  
**95.2%**  
A.F.U.E.




Viessmann Manufacturing Company Inc.  
750 McMurray Road  
Waterloo, ON N2V 2G5 • Canada  
Tel.: (519) 885-6300 Fax: (519) 885-0887  
www.viessmann.ca

Viessmann Manufacturing Company (U.S.) Inc.  
45 Access Road  
Warwick, RI 02886 • U.S.A.  
Tel.: (401) 732-0667 Fax: (401) 732-0590  
www.viessmann-us.com



## The benefits at a glance:

- **Highest efficiency** of up to 98% with full modulation and 95.2% A.F.U.E. on all models.
- **Maximum reliability**  
High-alloy stainless steel (SA240 316 Ti) Inox-Radial heat exchanger constructed in compliance with CSA B51 and ASME Section IV. Meets ASME/CSD-1 requirements (for WB2 11-44/15-60).
- **Protect the environment**  
Extremely low emissions with modulating MatriX-compact gas burner.  
NO<sub>x</sub>: 8.9 ppm (air-free)  
CO: 5.5 ppm (air-free)
- **Compact, lightweight design.**  
Zero clearance to combustibles. Limited space is not an issue.
- **Clean, esthetically pleasing** appearance for installation anywhere in your living area.
- **Extremely quiet** operation; quieter than most refrigerators.
- **Smart burner technology**  
Factory calibrated, self-adjusting burner. **No adjusting in the field, reduced operating cost.**
- **Powerful and user-friendly** outdoor reset control, built-in and prewired with diagnostic system. Controls multi-temperature space heating and DHW systems.
- **Reliable DHW production two ways:**
  - Combi model features an integrated DHW Quick System. No DHW tank required.
  - Unlimited DHW supply with a stand-alone DHW tank with any other Vitodens 200.



**Inox-Radial heat exchanger surface**



**MatriX-compact gas burner**



**Powerful and user-friendly control**




- **Multiple venting options**
  - Horizontal or vertical sealed combustion coaxial vent system (factory supplied).

- Horizontal, vertical or hybrid sealed combustion double-pipe vent system (field supplied).
- Horizontal or vertical single-wall vent system (field supplied).

- **Multi-boiler installation**  
Models WB2-44 and -60 can be combined to a maximum of 4. **Ideal for light commercial applications.**
- **One version for all elevation levels** (0 – 10 000 ft. / 0 – 3048 m).
- **Fast, simple conversions** to natural or propane gas.



VITODENS 200	WB2	6-24C	6-24	8-32	11-44	15-60
Rated input range (NG)	MBH	25-91	25-91	37-124	55-172	80-230
Rated input range (LP)	MBH	25-81	25-81	37-112	55-155	80-214
Depth	inches	16	16	16	21¼	21¼
Width	inches	19¼	19¼	19¼	23½	23½
Height	inches	35½	35½	35½	35½	35½

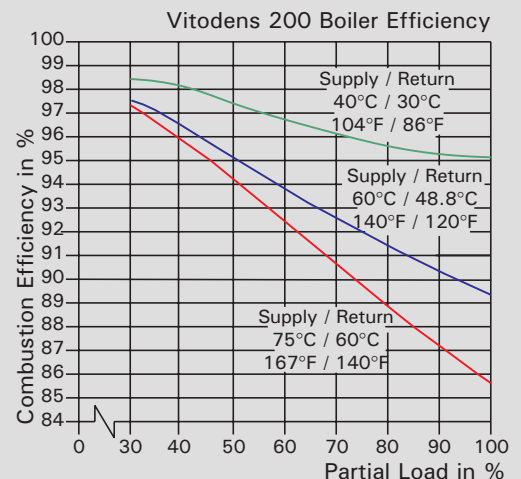

Technical information subject to change without notice.